

3,1W / 210lm / 4000K / On/Off / Medium 40°  
/ ø45mm

63480



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Easy recessing system with spring clips.  
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 3,1W         | 4W        |
| Flux       |       | 280lm        | 210lm     |
| Efficiency |       | 90lm/W       | 53lm/W    |
| LOR        |       | -            | 75%       |
| UGR        |       | -            | <10       |




Beam angle  
Medium 40°

Application



Weight  
0,20Kg

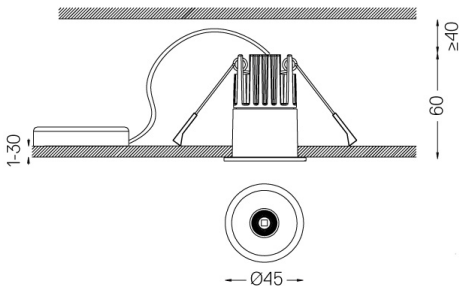

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560313L