

5,9W / 490lm / 2700K / On/Off /
Asymmetric / ø54mm

63510

Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		5,9W	7,4W
Flux		570lm	490lm
Efficiency		97lm/W	66lm/W
LOR		-	86%
UGR		-	-



Beam angle
Asymmetric

Application



Weight



Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59039** Trimless accessory (12.5mm ceilings)
155x18mm
- 59040** Trimless accessory (15mm ceilings)
155x20mm
- 59041** Trimless accessory (25mm ceilings)
155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560388

One Asymmetric Trimless

Trimless accessory (12.5mm
ceilings)

59039




Ø65



Trimless accessory One ø60
For 12.5mm ceilings.

Weight
0,01Kg

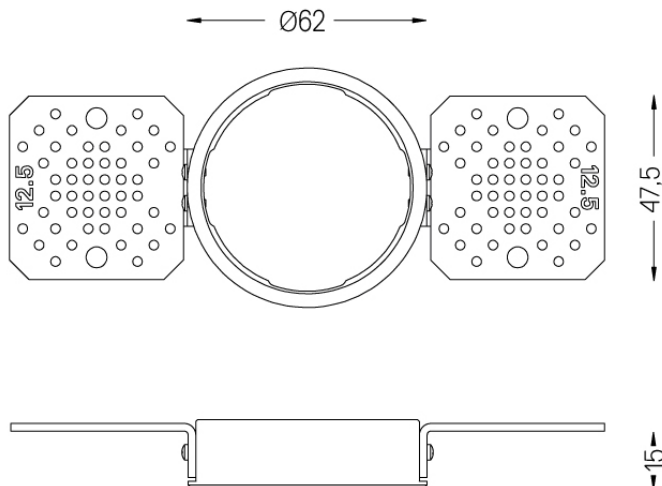

One Asymmetric Trimless

Trimless accessory (15mm
ceilings)

59040




Ø65



Trimless accessory One ø60
For 15mm ceilings.

Weight
0,01Kg

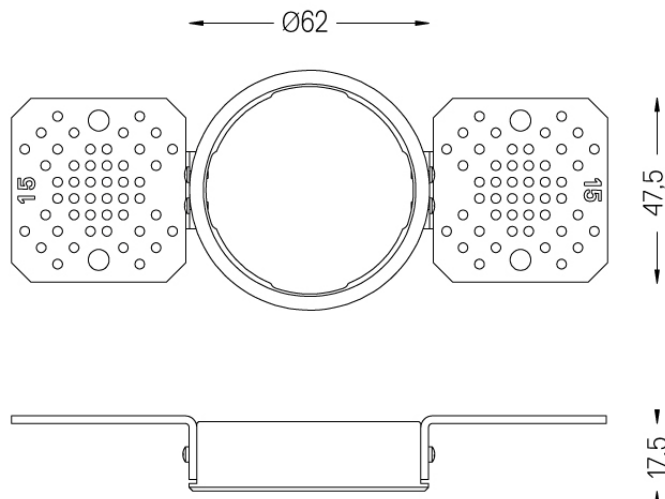

One Asymmetric Trimless

Trimless accessory (25mm
ceilings)

59041



Ø65



Trimless accessory One ø60
For 25mm ceilings.

Weight
0,01Kg

