

3,1W / 200lm / 3000K / DALI / Medium 40° /  
ø39mm

63532

Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		3,1W	4W
Flux		260lm	200lm
Efficiency		84lm/W	50lm/W
LOR		-	77%
UGR		-	<10



Beam angle  
Medium 40°

Application



Weight



### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59042** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59043** Trimless accessory (15mm ceilings)  
140x20mm
- 59044** Trimless accessory (25mm ceilings)  
140x30mm

### Optional

- 59083** Removal tool

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

### Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560290L

## One Trimless

Trimless accessory (12.5mm  
ceilings)

59042




Ø53



Trimless accessory One ø45  
For 12.5mm ceilings.

Weight  
0,01Kg

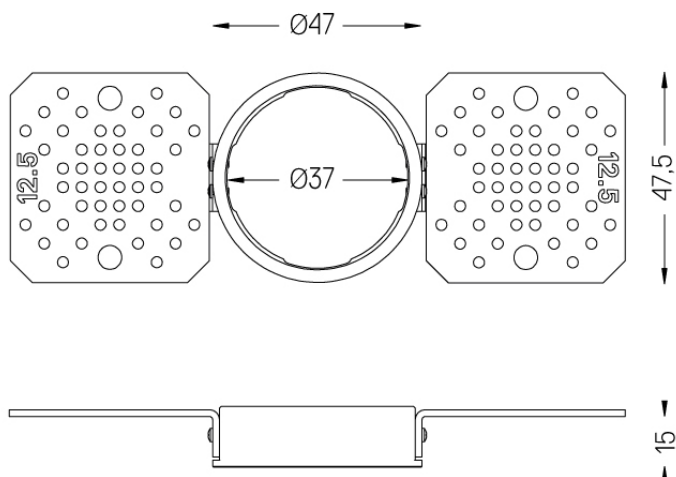

## One Trimless

Trimless accessory (15mm  
ceilings)

59043




Ø53



Trimless accessory One ø45  
For 15mm ceilings.

Weight  
0,01Kg

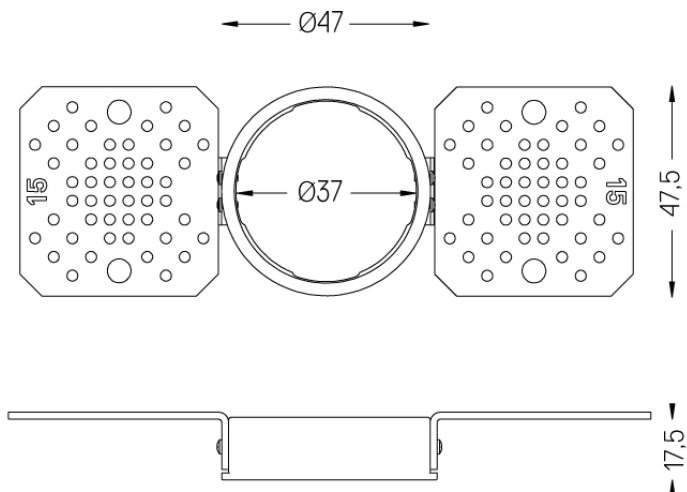

## One Trimless

Trimless accessory (25mm  
ceilings)

59044





Ø53



Trimless accessory One ø45  
For 25mm ceilings.

Weight  
0,01Kg

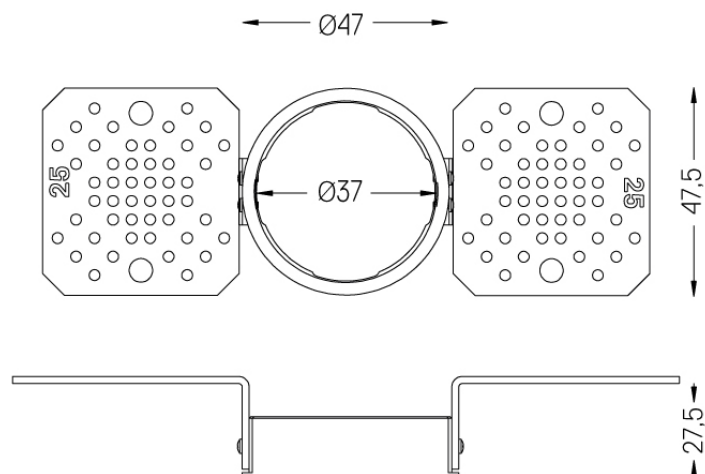

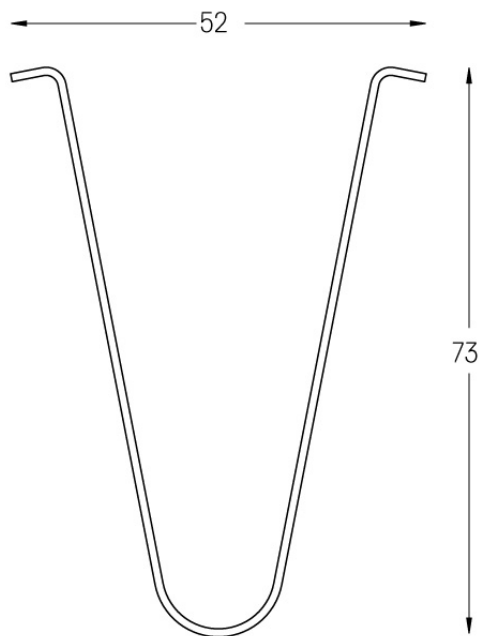

Removal tool

59083



Removal tool for Spot on  
luminaires.

Finishes  
.99