

One Trimless

**3,1W / 210lm / 4000K / DALI / Medium 40° /
ø39mm**

63536



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Lightcore optics for defined and perfectly controlled beam of light.


Recessing accessory supplied separately.


LED CRI>80 / >50.000h, L80/B10

2-step MacAdam / Power supply included.

IP20 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power	3,1W		4W
Flux	280lm		210lm
Efficiency	90lm/W		53lm/W
LOR	-		75%
UGR	-		<10




Beam angle
Medium 40°

Application



Weight

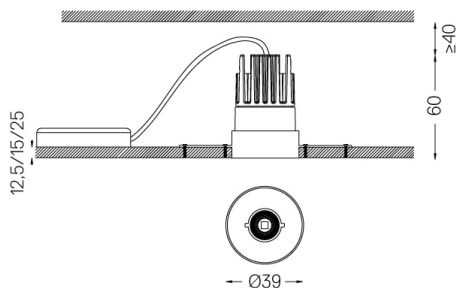

Finishes

- ☐ .01 White / RAL 9010
☒ .02 Black / RAL 9005

Mandatory

59042 Trimless accessory (12.5mm ceilings)

140x18mm

59043 Trimless accessory (15mm ceilings)

140x20mm

59044 Trimless accessory (25mm ceilings)

140x30mm

Optional

59083 Removal tool

For the specific supply of "DALI 2" drivers, please contact:

support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560313L

One Trimless

Trimless accessory (12.5mm
ceilings)

59042




Ø53



Trimless accessory One ø45
For 12.5mm ceilings.

Weight
0,01Kg

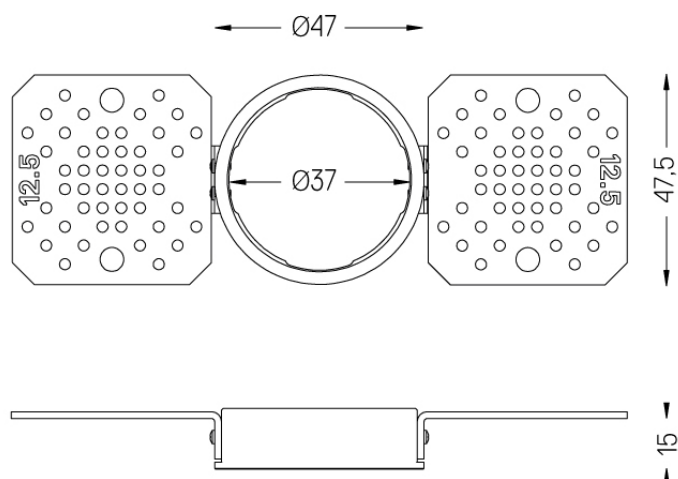

One Trimless

Trimless accessory (15mm
ceilings)

59043




Ø53



Trimless accessory One ø45
For 15mm ceilings.

Weight
0,01Kg

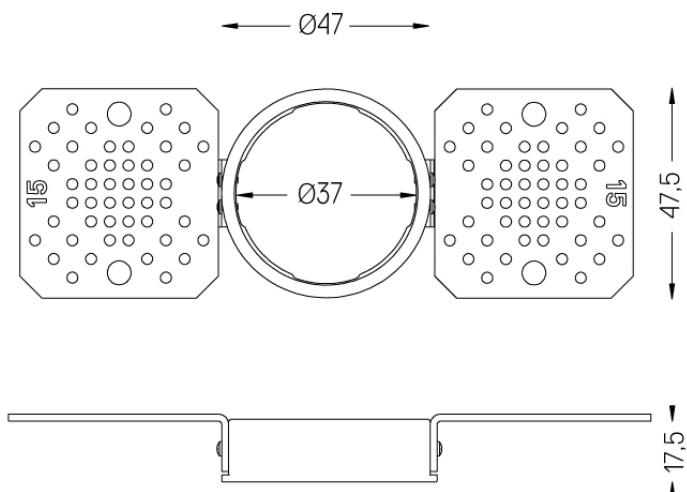

One Trimless

Trimless accessory (25mm
ceilings)

59044





Ø53



Trimless accessory One ø45
For 25mm ceilings.

Weight
0,01Kg

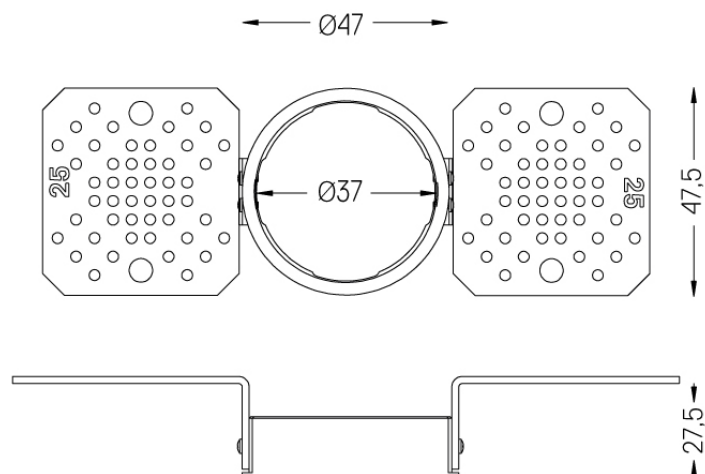

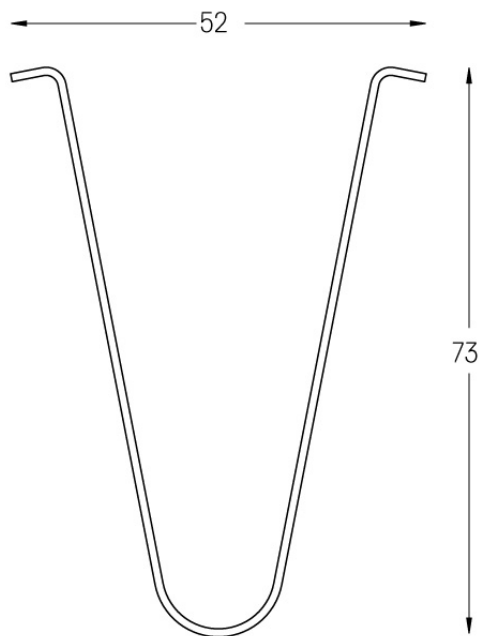

Removal tool

59083



Removal tool for Spot on
luminaires.

Finishes
.99