


5,6W / 350lm / 3000K / DALI / Medium 40° /  
54x54mm

63544

Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		5,6W	7W
Flux		460lm	350lm
Efficiency		82lm/W	50lm/W
LOR		-	76%
UGR		-	<10



Beam angle  
Medium 40°

Application



Weight



### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59045** Trimless accessory (12.5mm ceilings)  
155x18mm
- 59046** Trimless accessory (15mm ceilings)  
155x20mm
- 59047** Trimless accessory (25mm ceilings)  
155x30mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560290H

## One Square Trimless

Trimless accessory (12.5mm  
ceilings)

59045




67x67



Trimless accessory One 60x60  
For 12.5mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

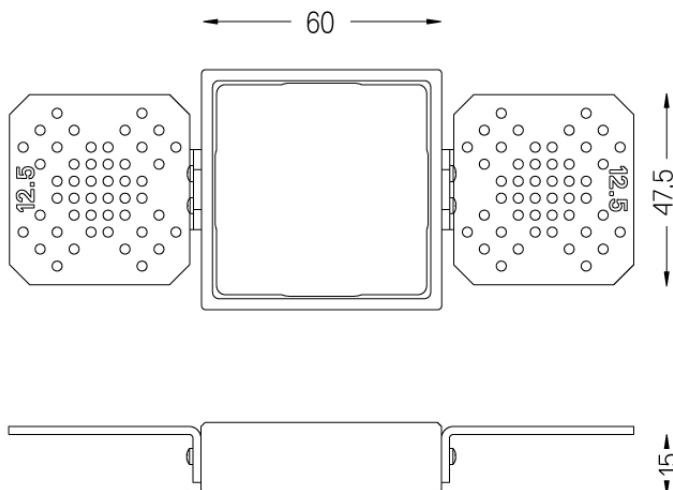

## One Square Trimless

Trimless accessory (15mm  
ceilings)

59046




67x67



Trimless accessory One 60x60  
For 15mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

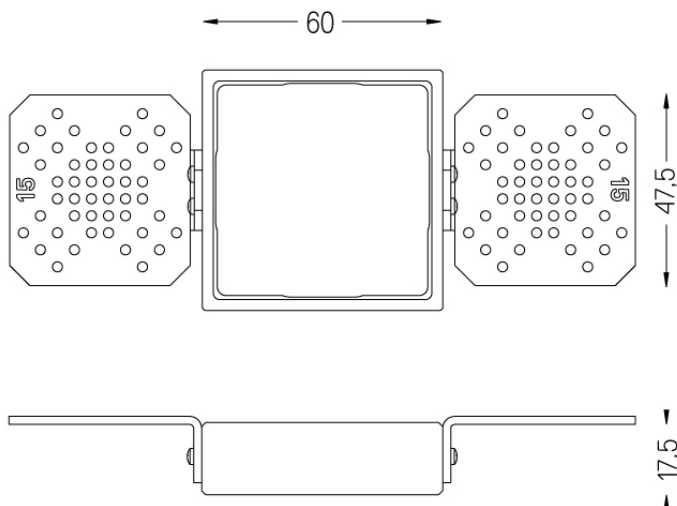

## One Square Trimless

Trimless accessory (25mm  
ceilings)

59047



67x67



Trimless accessory One 60x60  
For 25mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

