


5,6W / 410lm / 3000K / DALI / Flood 56° /
54x54mm


63545

Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 5,6W | 7W |
| Flux | | 460lm | 410lm |
| Efficiency | | 82lm/W | 59lm/W |
| LOR | | - | 89% |
| UGR | | - | <19 |

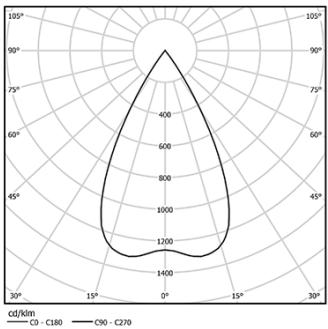


Beam angle
Flood 56°

Application



Weight

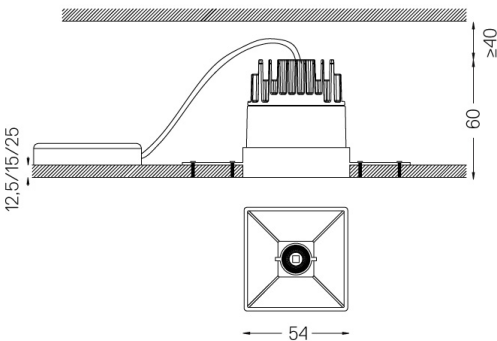

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59045 Trimless accessory (12.5mm ceilings)
155x18mm
- 59046 Trimless accessory (15mm ceilings)
155x20mm
- 59047 Trimless accessory (25mm ceilings)
155x30mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560290H

One Square Trimless

Trimless accessory (12.5mm
ceilings)

59045




67x67



Trimless accessory One 60x60
For 12.5mm ceilings.

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010

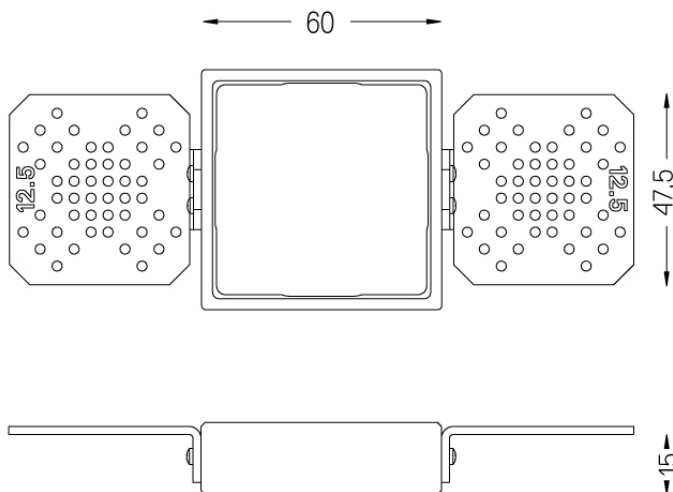

One Square Trimless

Trimless accessory (15mm
ceilings)

59046




67x67



Trimless accessory One 60x60
For 15mm ceilings.

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010

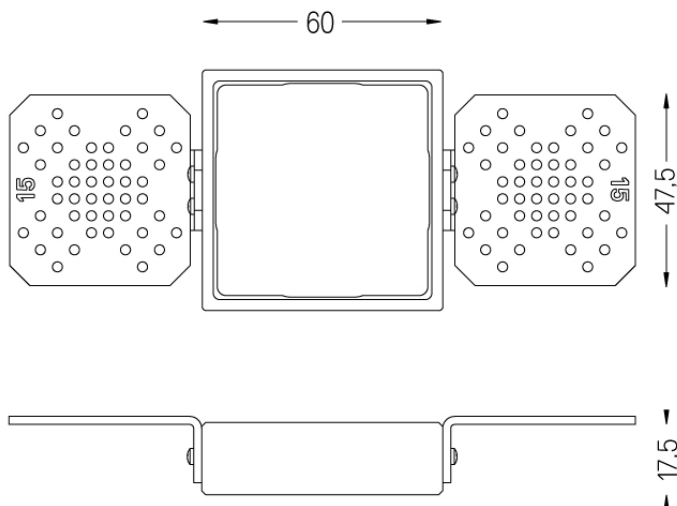

One Square Trimless

Trimless accessory (25mm
ceilings)

59047



67x67



Trimless accessory One 60x60
For 25mm ceilings.

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010

