
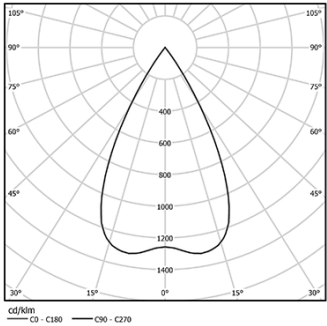


Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



 <b>2700K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>3,1W</b>	<b>4W</b>
<b>Flux</b>	<b>260lm</b>	<b>230lm</b>
<b>Efficiency</b>	<b>84lm/W</b>	<b>58lm/W</b>
<b>LOR</b>	<b>-</b>	<b>88%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;16</b>




Beam angle  
Flood 56°

Application



Weight

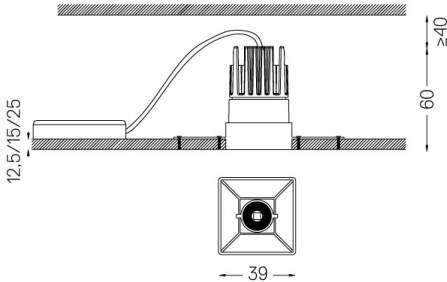

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59048** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59049** Trimless accessory (15mm ceilings)  
140x20mm
- 59050** Trimless accessory (25mm ceilings)  
140x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560312L