

Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 3,1W   |              | 4W        |
| Flux       | 260lm  |              | 230lm     |
| Efficiency | 84lm/W |              | 58lm/W    |
| LOR        | -      |              | 88%       |
| UGR        | -      |              | <16       |




Beam angle  
Flood 56°

Application



Weight

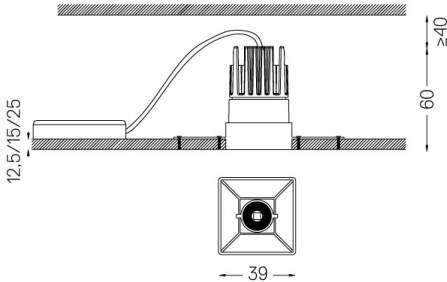

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

- Mandatory
- 59048 Trimless accessory (12.5mm ceilings)  
140x18mm
  - 59049 Trimless accessory (15mm ceilings)  
140x20mm
  - 59050 Trimless accessory (25mm ceilings)  
140x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560290L