

3,1W / 230lm / 3000K / DALI / Flood 56° /  
39x39mm

63557

Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		3,1W	4W
Flux		260lm	230lm
Efficiency		84lm/W	58lm/W
LOR		-	88%
UGR		-	<16



Beam angle  
Flood 56°

Application



Weight



### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59048** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59049** Trimless accessory (15mm ceilings)  
140x20mm
- 59050** Trimless accessory (25mm ceilings)  
140x30mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560290L

## One Square Trimless

Trimless accessory (12.5mm  
ceilings)

59048




52x52



Trimless accessory One 45x45.  
For 12.5mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

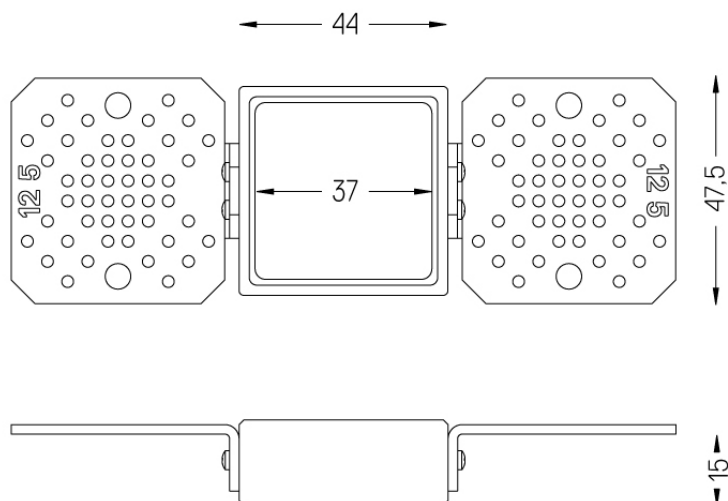

## One Square Trimless



52x52

Trimless accessory (15mm  
ceilings)


59049



Trimless accessory One 45x45.  
For 15mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

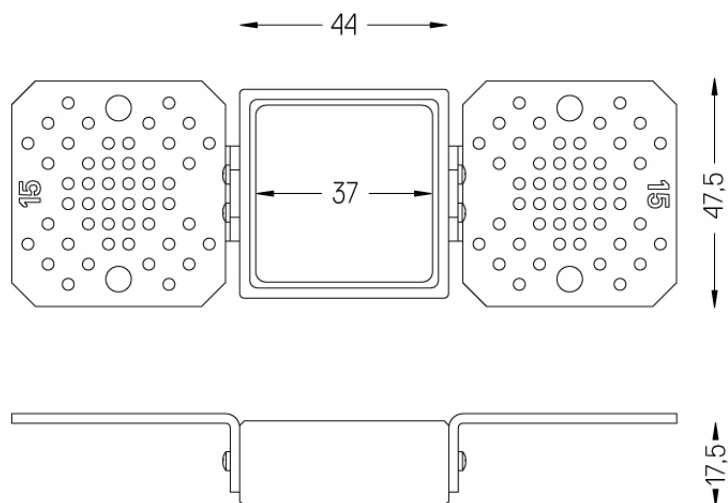

## One Square Trimless

Trimless accessory (25mm  
ceilings)

59050



52x52



Trimless accessory One 45x45.  
For 25mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

