

3,1W / 240lm / 4000K / DALI / Flood 56° /  
39x39mm

63561

Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		3,1W	4W
Flux		280lm	240lm
Efficiency		90lm/W	60lm/W
LOR		-	86%
UGR		-	<16




Beam angle  
Flood 56°

Application



Weight

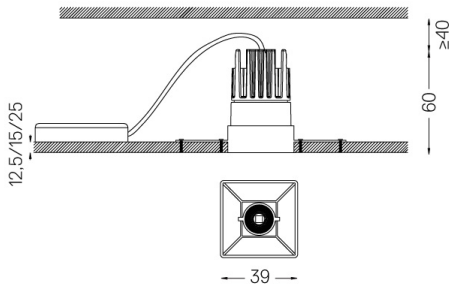

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59048 Trimless accessory (12.5mm ceilings)  
140x18mm
- 59049 Trimless accessory (15mm ceilings)  
140x20mm
- 59050 Trimless accessory (25mm ceilings)  
140x30mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560313L

## One Square Trimless

Trimless accessory (12.5mm  
ceilings)

59048




52x52



Trimless accessory One 45x45.  
For 12.5mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

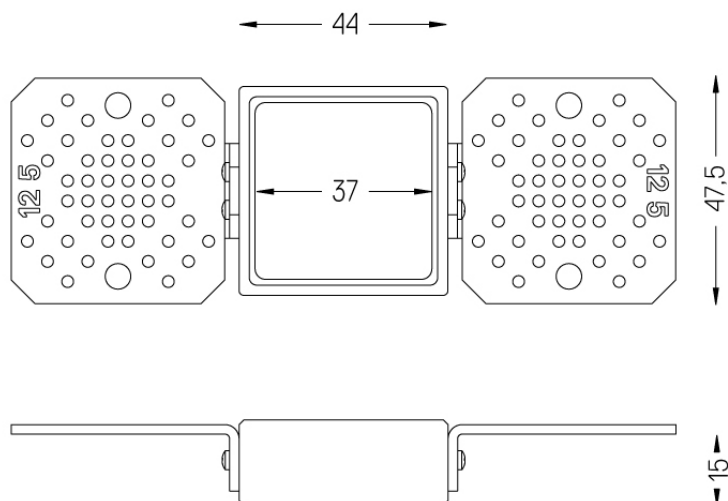

## One Square Trimless



52x52

Trimless accessory (15mm  
ceilings)


59049



Trimless accessory One 45x45.  
For 15mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

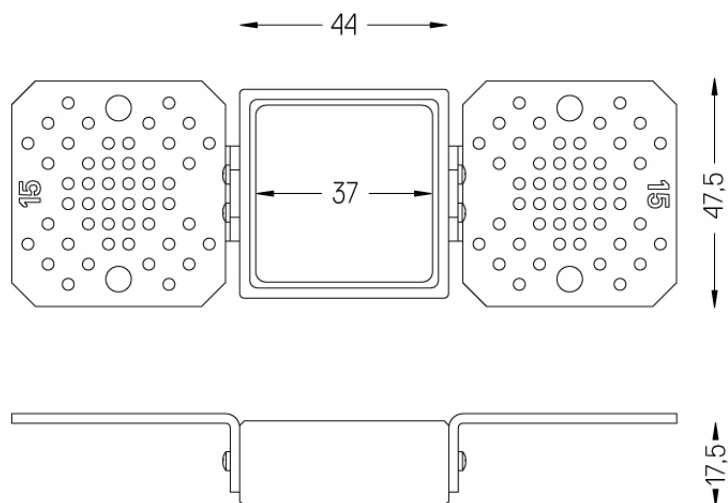

## One Square Trimless

Trimless accessory (25mm  
ceilings)

59050



52x52



Trimless accessory One 45x45.  
For 25mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

