

5,6W / 200lm / 2700K / On/Off / Spot 15° /
ø60mm

63562



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Orientable by 20° horizontal rotation.
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 2700K | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power | 5,6W | | 7W |
| Flux | 440lm | | 200lm |
| Efficiency | 79lm/W | | 29lm/W |
| LOR | - | | 45% |
| UGR | - | | <10 |



Beam angle
Spot 15°


Application



Weight
0,58Kg



Ø54

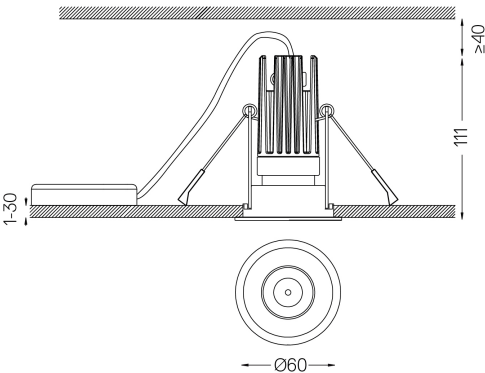

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560312H