

# O/M

## One Adjustable

5,6W / 200lm / 3000K / DALI / Spot 15° /  
ø60mm

63568



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.


Orientable by 20° horizontal rotation.

Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 5,6W   |              | 7W        |
| Flux       | 440lm  |              | 200lm     |
| Efficiency | 79lm/W |              | 29lm/W    |
| LOR        | -      |              | 45%       |
| UGR        | -      |              | <10       |




Beam angle  
Spot 15°

Application



Weight  
0,58Kg

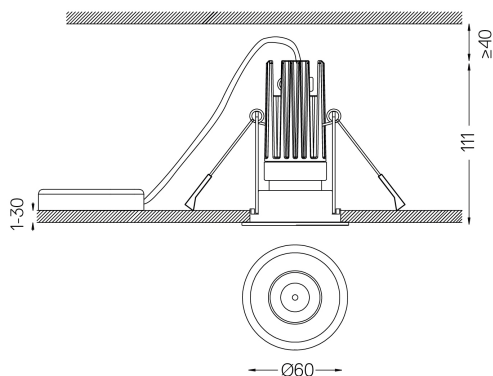

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560290H