

## One Surface/Pendant

9,8W / 600lm / 3000K / On/Off / Spot 15° /  
ø85mm

63599



Design: O/M + Bartenbach GmbH

Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.

Fitting accessories ordered separately

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		9,8W	12,3W
Flux		1035lm	600lm
Efficiency		106lm/W	49lm/W
LOR		-	58%
UGR		-	<10




Beam angle  
Spot 15°

Application



Weight  
0,58Kg

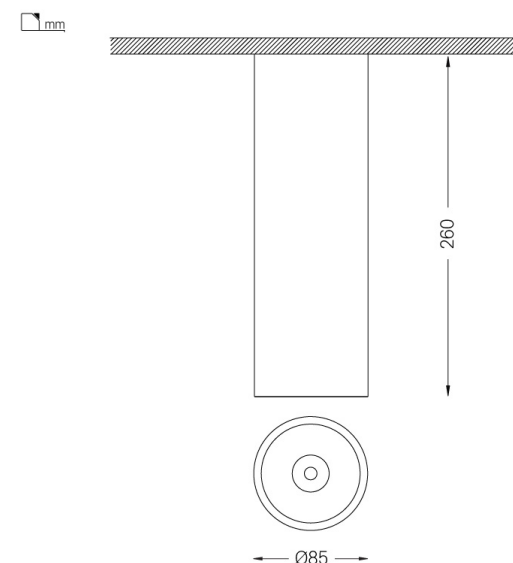

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59051 Accessory for pendant installation  
ø80x35mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier 2053560257H



## One Surface/Pendant

Accessory for pendant  
installation

59051



Accessory for pendant installation  
for One

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010  
● .02 Black / RAL 9005