

9,8W / 600lm / 3000K / DALI / Spot 15° /
ø85mm

63605



Design: O/M + Bartenbach GmbH

Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.

Fitting accessories ordered separately

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		9,8W	12,3W
Flux		1035lm	600lm
Efficiency		106lm/W	49lm/W
LOR		-	58%
UGR		-	<10




Beam angle
Spot 15°

Application



Weight
0,58Kg

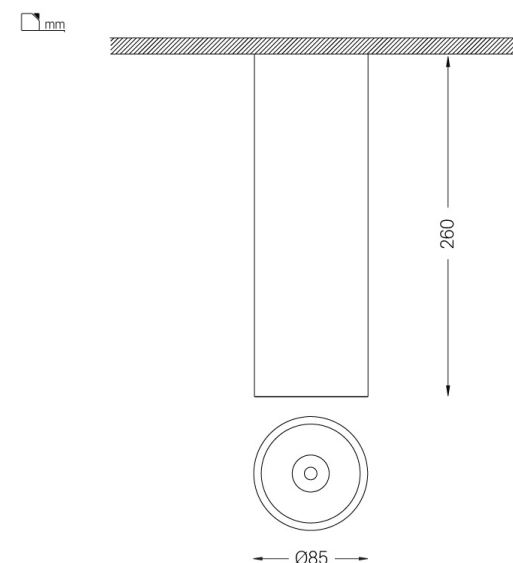

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005


Mandatory

59051 Accessory for pendant installation
ø80x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560257H

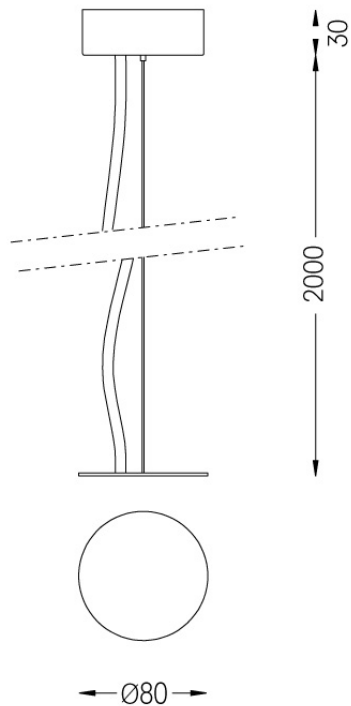

One Surface/Pendant

Accessory for pendant
installation

59051



Accessory for pendant installation
for One

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010
● .02 Black / RAL 9005