

Minimum quantity requested for purchase orders
(>200m)




Design: OM + Bartenbach GmbH
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
Aluminium anodised end caps with matt finish.
Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|--------------|
| Power | | 22,4+28W* | 26,4+32W* |
| Flux | | 3000+2200lm* | 2400+1760lm* |
| Efficiency | | 102lm/W | 68lm/W |
| LOR | | - | 80% |
| UGR | | - | <19 |

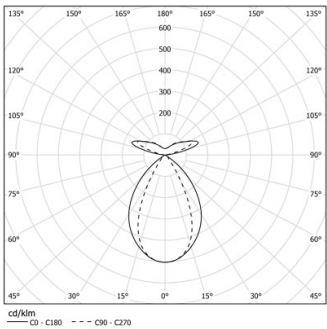

Beam angle
Wide flood 76° /
batwing

Application

Weight
1,9Kg

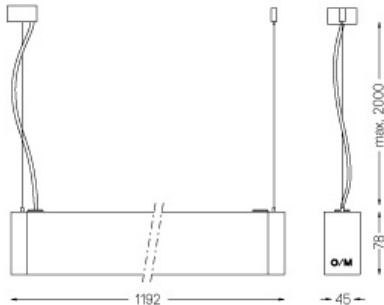

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory

56051 Clear Base DALI

ø60x35mm