

inFinit Pendant direct/indirect

44,8+56W* / 4800+3520lm* / 2200K-5000K
/ DALI / Wide flood 76° / batwing / 2344mm

63769

Minimum quantity requested for purchase orders
(>200m)



Design: OM + Bartenbach GmbH

Pendant direct and indirect luminaire with housing made of aluminium in matte finish.

Aluminium anodised end caps with matt finish.


Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|--------------|
| Power | | 44,8+56W* | 52,8+64W* |
| Flux | | 6000+4400lm* | 4800+3520lm* |
| Efficiency | | 103lm/W | 70lm/W |
| LOR | | - | 80% |
| UGR | | - | <19 |




Beam angle
Wide flood 76° /
batwing

Application



Weight
3,8Kg

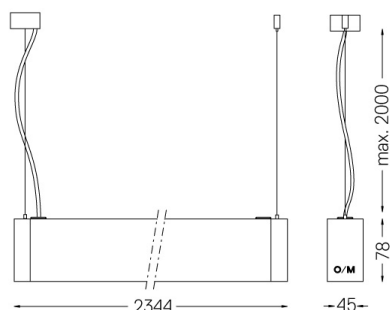

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory

56051 Clear Base DALI

ø60x35mm