

52W / 3760lm / 3000K / DALI / Medium 31° /  
1211mm

63961



Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.


Aluminium anodised end caps with electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision45 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source. Fitting accessories for pendant version ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		52W	61,2W
Flux		5160lm	3760lm
Efficiency		99lm/W	61lm/W
LOR		-	73%
UGR		-	<10




Beam angle  
Medium 31°

Application



Weight  
2,5Kg

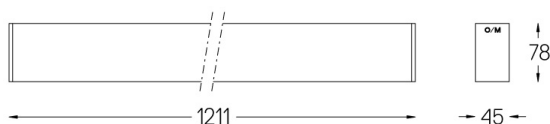

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

#### Mandatory

**54036** Pendant direct fitting accessory  
**56051** Clear Base DALI  
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com