

21W / 1320lm / 2700K / On/Off / Medium 31°
/ 900mm

63996

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Modules**

 - A inVision Module

LED	2700K	Light Source	Luminaire
Power	21W		25,6W
Flux	1800lm		1320lm
Efficiency	86lm/W		52lm/W
LOR	-		73%
UGR	-		<10




Beam angle
Medium 31°

Application



Weight
0,6Kg

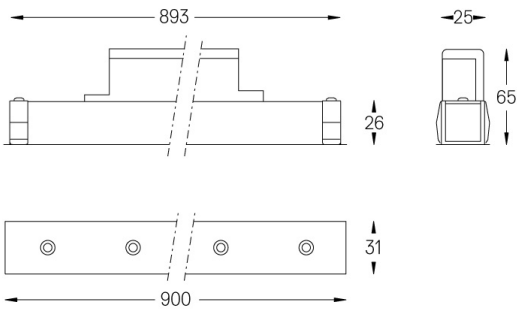

- Finishes**
- .01 White / RAL 9010
 - .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com