

21W / 1470lm / 3000K / DALI / Flood 52° /  
900mm

64010


Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover  
plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



- Structure**
  - 1 Profile
  - 2 End caps
  - 3 Fitting accessories
  - 4 Profile coupling
- Modules**
  - A inVision Module

| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 21W          | 25,6W     |
| Flux       |       | 1935lm       | 1470lm    |
| Efficiency |       | 92lm/W       | 57lm/W    |
| LOR        |       | -            | 76%       |
| UGR        |       | -            | <10       |

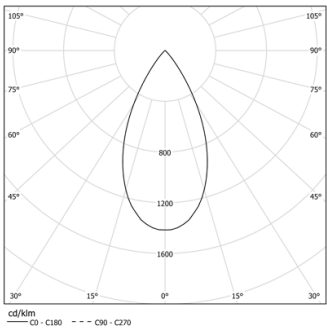


Beam angle  
Flood 52°

Application



Weight  
0,6Kg

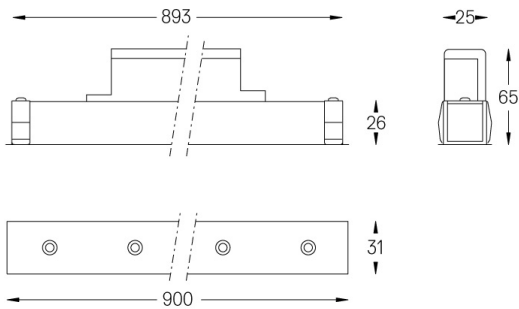

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com