

63W / 2400lm / 2700K / On/Off / Diffuse  
indirect / 1411mm

64121



Design: Eduardo Souto de Moura

MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for indirect light.

Three-phase track (On/Off or DALI) for installing spotlights.

Fitting accessories supplied separately.

LED CRI>90 />50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz




| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 63W          | 90W       |
| Flux       |       | 6000lm       | 2400lm    |
| Efficiency |       | 95lm/W       | 27lm/W    |
| LOR        |       | -            | 40%       |
| UGR        |       | -            | <25       |



Application

Weight  
7Kg

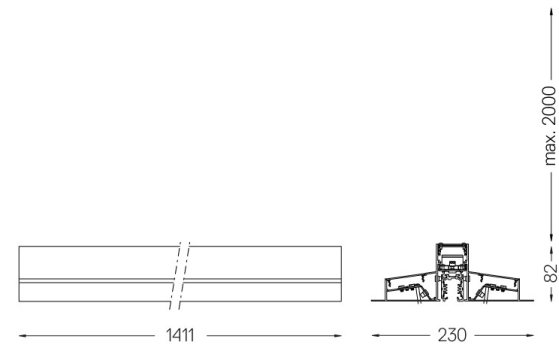

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

54034 Clear base  
Ø60x35mm

54080 Aluminium base  
Ø60x37mm