

90W / 4600lm / 3000K / On/Off / Diffuse
indirect / 2821mm

64130



Design: Eduardo Souto de Moura

MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for indirect light.

Three-phase track (On/Off or DALI) for installing spotlights.

Fitting accessories supplied separately.

LED CRI>80 />50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz




| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 90W | 130W |
| Flux | | 11500lm | 4600lm |
| Efficiency | | 128lm/W | 35lm/W |
| LOR | | - | 40% |
| UGR | | - | <25 |



Beam angle
Diffuse indirect

Application

Weight
14Kg

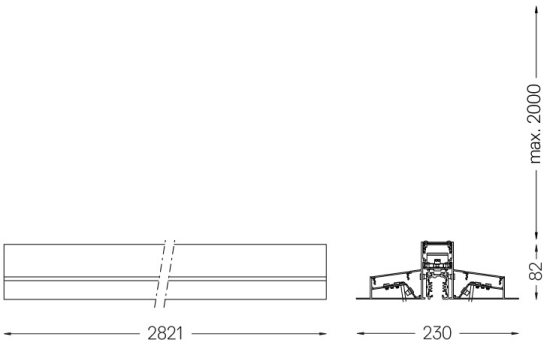

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

- 54034 Clear base
Ø60x35mm
- 54080 Aluminium base
Ø60x37mm