


28W / 2600lm / 3000K / DALI / Prismatic /
1119mm

64381

 Code no longer in production

Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

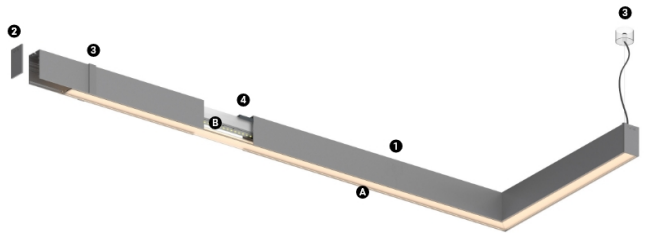

- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Diffuser**

 - A Polycarbonate frost diffuser

Light Source

 - B LED Modules

LED	3000K	Light Source	Luminaire
Power		28W	32W
Flux		4440lm	2600lm
Efficiency		159lm/W	81lm/W
LOR		-	59%
UGR		-	<25


Beam angle
Prismatic

Application



Weight
0,57Kg

Comming soon

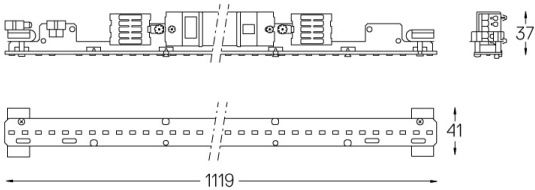

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com