

5,6W / 350lm / 3000K / DALI / Medium 41° /
ø45mm

64466



Design: O/M + Bartenbach GmbH

Recessed spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.

Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.


Orientable by 150° horizontal rotation and 330° vertical rotation.

Driver included.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver included.
IP20 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|---------------------|-------|--------------|-----------|
| Power | | 5,6W | 7W |
| Flux | | 460lm | 350lm |
| Efficiency | | 82lm/W | 50lm/W |
| LOR | | - | 76% |
| Operating Condition | | - | 230Vac |

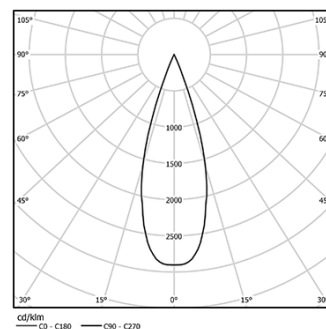


Beam angle
Medium 41°

Application



Weight
0,27Kg

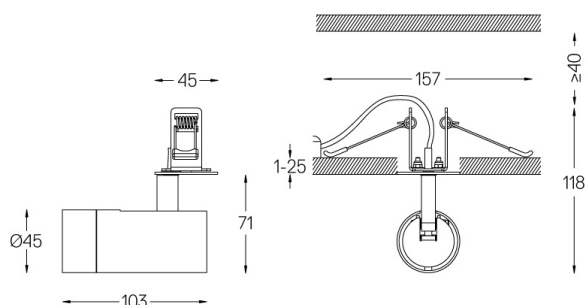

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

59072 1/4 CTO

ø35x1,1mm

59073 1/2 CTO

ø35x1,1mm

59074 Louvre

ø35x2mm

59075 Soft diffuser

ø35x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560290L