

5,6W / 430lm / 4000K / On/Off / Flood 59° /  
ø45mm

64546

Design: O/M + Bartenbach GmbH

Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam. Orientable by 150° horizontal rotation and 330° vertical rotation. Driver included.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Driver included  
IP20 | 48Vdc




LED 4000K	Light Source	Luminaire
Power	5,6W	7W
Flux	460lm	430lm
Efficiency	82lm/W	61lm/W
LOR	-	93%
Operating Condition	-	48Vdc



Beam angle  
Flood 59°

Application

Weight  
0,27Kg

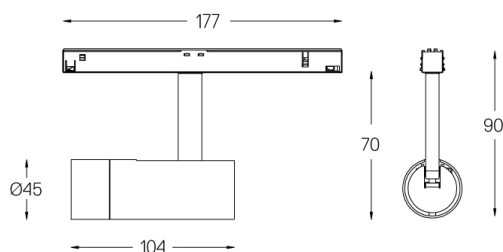

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

#### Optional

- 59072** 1/4 CTO  
ø35x1,1mm
- 59073** 1/2 CTO  
ø35x1,1mm
- 59074** Louvre  
ø35x2mm
- 59075** Soft diffuser  
ø35x2mm