

O/M

Sys Over module

5,6W / 430lm / 4000K / DALI / Flood 59° /
ø45mm

64552


Design: O/M + Bartenbach GmbH

Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Accurate reflector for a defined and controlled beam of light orientable by 150° horizontal rotation and 330° vertical rotation.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 48Vdc




| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 5,6W | 7W |
| Flux | | 460lm | 430lm |
| Efficiency | | 82lm/W | 61lm/W |
| LOR | | - | 93% |
| UGR | | - | <16 |




Beam angle
Flood 59°

Application



Weight
0,27Kg

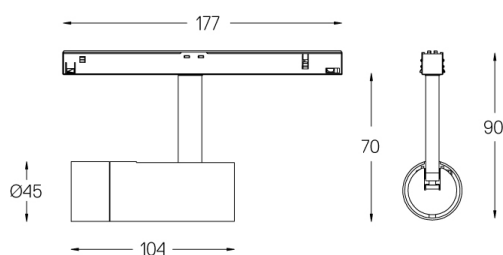

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59072** 1/4 CTO
ø35x1,1mm
- 59073** 1/2 CTO
ø35x1,1mm
- 59074** Louvre
ø35x2mm
- 59075** Soft diffuser
ø35x2mm