

32+63W / 1650+3300lm / 4000K / DALI /  
Diffuse Direct/ Indirect / 1485mm

64555



Design: Eduardo Souto de Moura

MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for direct light and indirect light.

Fitting accessories supplied separately.


LED CRI&gt;80 / &gt;50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED 4000K	Light Source	Luminaire
<b>Power</b>	<b>32+63W</b>	<b>45+90W</b>
<b>Flux</b>	<b>4100+8200lm</b>	<b>1650+3300lm</b>
<b>Efficiency</b>	<b>129lm/W</b>	<b>37lm/W</b>
<b>LOR</b>	-	<b>40%</b>
<b>UGR</b>	-	<b>&lt;25</b>

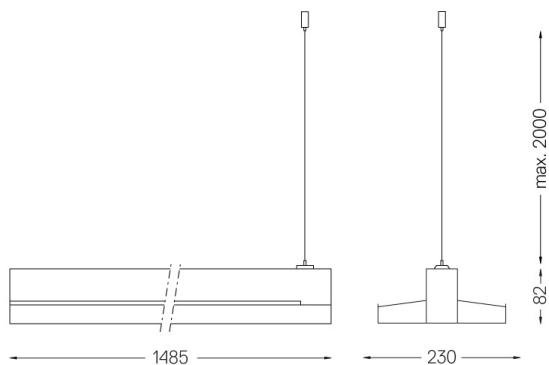

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

## Mandatory

56051 Clear base DALI

Ø60x35mm

54081 Aluminium base DALI

Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com