

33W / 3965lm / 3000K / DALI / Diffuse /  
ø550mm

64562

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.


Frosted acrylic diffuser with perfect light uniformity.

Recessing accessories supplied separately.

LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP43 | 230Vac | 50/60Hz




| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 33W          | 38,8W     |
| Flux       |       | 5670lm       | 3965lm    |
| Efficiency |       | 172lm/W      | 102lm/W   |
| LOR        |       | -            | 70%       |
| UGR        |       | -            | <25       |

Beam angle  
Diffuse

Application

Weight  
6,1Kg

Ø557

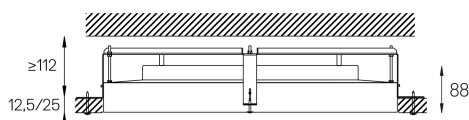

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

## Mandatory

59078 Recessed fitting accessory  
Ø598x698x114

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Recessed accessory for different ceiling heights under request

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C

Model Identifier 89603016