

33W / 3965lm / 3000K / DALI / Diffuse /
ø550mm

64562

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Frosted acrylic diffuser with perfect light uniformity.

Recessing accessories supplied separately.


LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP43 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 33W | 38,8W |
| Flux | | 5670lm | 3965lm |
| Efficiency | | 172lm/W | 102lm/W |
| LOR | | - | 70% |
| UGR | | - | <25 |




Beam angle
Diffuse

Application

Weight
6,1Kg



Ø557

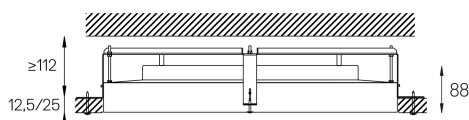

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

59078 Recessed fitting accessory
Ø598x698x114

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Recessed accessory for different ceiling heights under request

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603016