

66W / 9570lm / 4000K / DALI / Diffuse /
ø850mm

64581

Design: O/M

Ceiling-mounted luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Frosted acrylic diffuser with perfect light uniformity.


LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

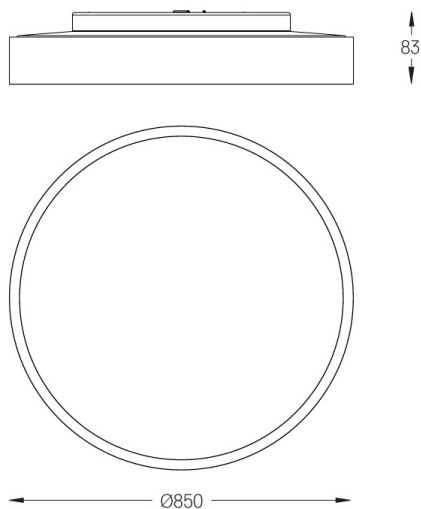
IP43 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 66W | 77,6W |
| Flux | | 11800lm | 9570lm |
| Efficiency | | 179lm/W | 123lm/W |
| LOR | | - | 81% |
| UGR | | - | <25 |

Beam angle
Diffuse

Application

Weight
8,5Kg

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603019