

66W / 9570lm / 4000K / On/Off / Diffuse /  
ø850mm

64590



## Design: O/M

Pendant luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions. Frosted acrylic diffuser with perfect light uniformity. Suspension system with millimetric height adjustment ordered separately. Power supply base made of clear polycarbonate, clear power cable (3x0,75mm<sup>2</sup>) and steel suspension cables (1,2mm) with millimetric height adjustment system supplied separately. Accessories supplied separately.


LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP43 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		66W	77,6W
Flux		11800lm	9570lm
Efficiency		179lm/W	123lm/W
LOR		-	81%
UGR		-	<25

Beam angle  
Diffuse

Application

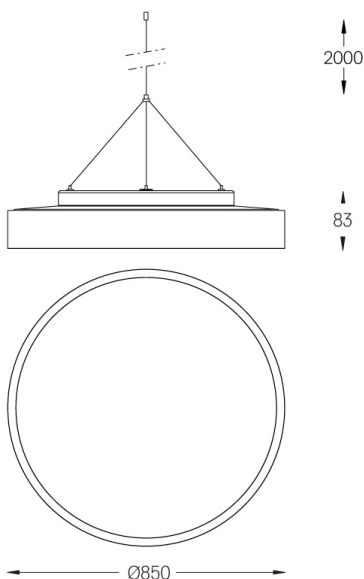Weight  
8,5Kg

## Finishes


- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

## Mandatory

59080 Pendant fitting accessory  
54034 Clear Base  
ø60x35mm

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603019

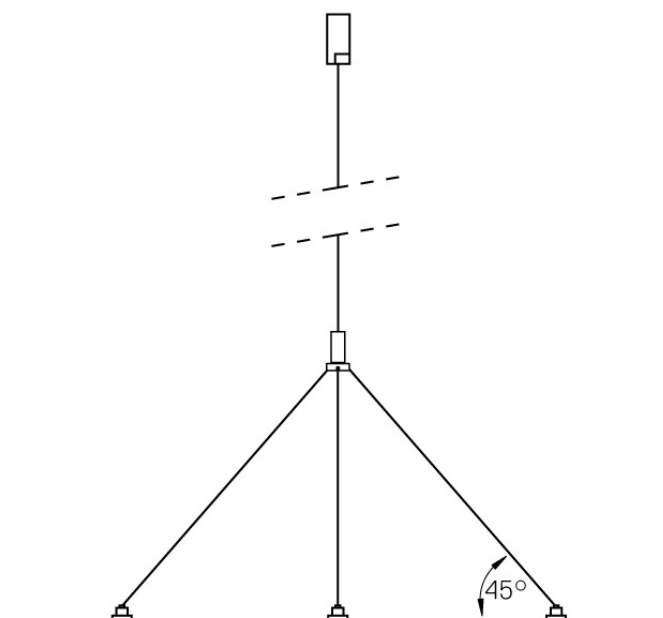

Sky pendant fitting accessory

Clear Base

54034



On/Off (3x0,75mm<sup>2</sup>). Includes:  
One clear polycarbonate power supply base (IP20).  
One clear power cable (2m).  
One clear power supply base must be applied every 30m (ø60x35mm)