

3,7W / 300lm / 2700K / On/Off / Flood 42° /
ø50mm

64733



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 100mA



| LED | 2700K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 3,7W | 3,7W | 3,7W |
| Flux | 375lm | 300lm | 300lm |
| Efficiency | 101lm/W | 81lm/W | 81lm/W |
| LOR | - | 80% | 80% |
| UGR | - | <16 | <16 |



Beam angle
Flood 42°

Application



Weight
0.08Kg



Finishes

- .04 Matt White
- .05 Matt Black



Mandatory

- 59088** Driver On/Off [100mA]
138x30x21mm
- 59089** Driver DALI [100mA]
144x30x21mm
- 59090** Driver PhaseCut [100mA]
122x41x23mm
- 59091** Driver 1-10V [120mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations


2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-27G1000-B-83

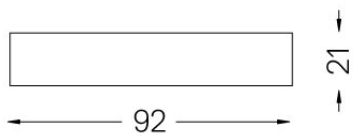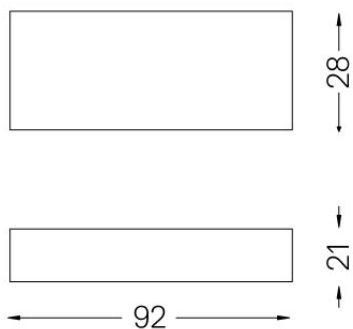

Go

Driver DALI [1 luminaire]


59088



Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II


Weight
0,1Kg

Finishes
.99




Go

Driver DALI [1 luminaire] 59089




Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

| | |
|--------|----------|
| Weight | Finishes |
| 0,06Kg | .99 |




Go

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II

| | |
|--------|----------|
| Weight | Finishes |
| 0,08Kg | .99 |

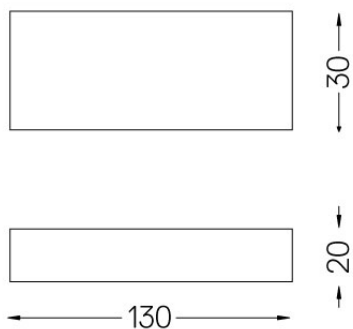

Go

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99