



**3,7W / 300lm / 2700K / On/Off / Flood 60° /  
ø50mm**

64734


Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



 LED	2700K	Light Source	Luminaire
Power	3,7W		3,7W
Flux	375lm		300lm
Efficiency	101lm/W		81lm/W
LOR	-		80%
UGR	-		<22



Beam angle  
Flood 60°


## Application



Weight  
0.08Kg



045

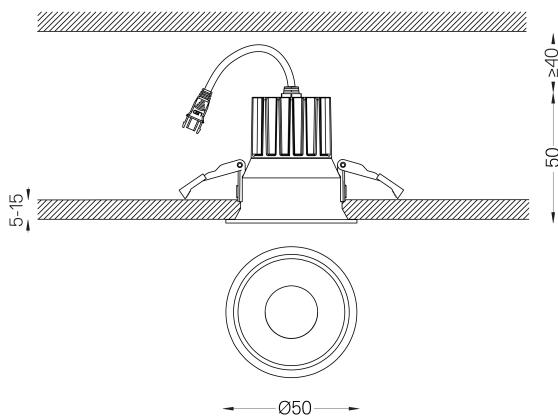

## Finishes

- .04 Matt White  
● .05 Matt Black

**Mandatory**

**59088 Driver On/Off [100mA]**

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

### 59090 Driver PhaseCut [100mA]

122x41x23mm

**59091 Driver 1-10V [120mA]**

130x30x20mm


The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

---

Data according to regulations


2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83

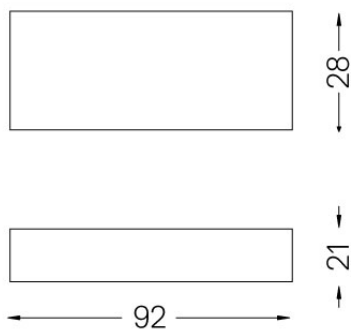

Go

Driver DALI [1 luminaire]


59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight  
0,1Kg

Finishes  
.99




Driver DALI [1 luminaire]

59089




Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,06Kg	.99




Go

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



Go

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99