




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



 <b>3000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>3,7W</b>	<b>3,7W</b>
<b>Flux</b>	<b>395lm</b>	<b>315lm</b>
<b>Efficiency</b>	<b>107lm/W</b>	<b>85lm/W</b>
<b>LOR</b>	-	<b>80%</b>
<b>UGR</b>	-	<b>&lt;22</b>




**Beam angle**  
**Flood 60°**

**Application**



**Weight**  
**0.08Kg**

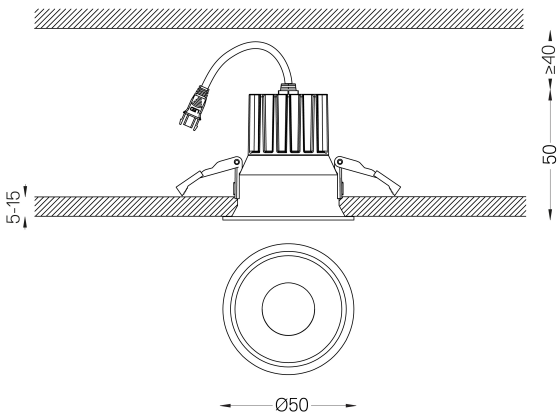

**Finishes**

☐ .04 Matt White

☒ .05 Matt Black

**Mandatory**

**59088** Driver On/Off [100mA]  
138x30x21mm


**59089** Driver DALI [100mA]  
144x30x21mm

**59090** Driver PhaseCut [100mA]  
122x41x23mm

**59091** Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com  
The 5-year guarantee applies only when the luminaire and driver are supplied together.


Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-30G1000-B-83



Go

Driver DALI [1 luminaire]


59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight  
0,1Kg

Finishes  
.99




Go

Driver DALI [1 luminaire] 59089




Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,06Kg	.99





Go

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99

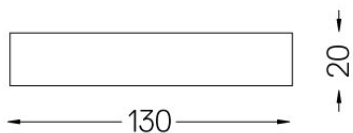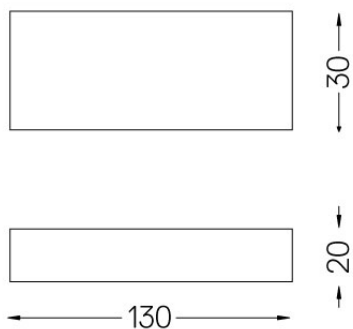

## Go

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99