

3,7W / 335lm / 4000K / On/Off / Flood 42° /  
ø50mm

64742



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



LED	4000K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	415lm	335lm	335lm
Efficiency	112lm/W	91lm/W	91lm/W
LOR	-	81%	81%
UGR	-	<16	<16



Beam angle  
Flood 42°

Application



Weight  
0.08Kg



Finishes

- .04 Matt White
- .05 Matt Black



Mandatory

- 59088 Driver On/Off [100mA]  
138x30x21mm
- 59089 Driver DALI [100mA]  
144x30x21mm
- 59090 Driver PhaseCut [100mA]  
122x41x23mm
- 59091 Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com  
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations


2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-40G1000-B-83

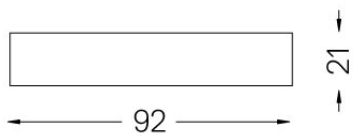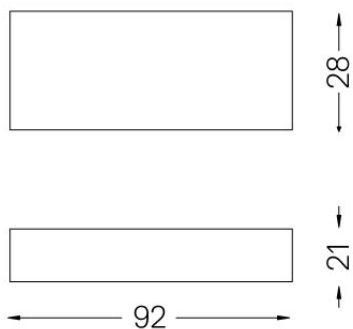

## Go

Driver DALI [1 luminaire]



59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg


Finishes  
.99




Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,06Kg

Finishes  
.99




Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



Go

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99