

**Go
Square**

**3,7W / 300lm / 2700K / Medium 26° /
50x50mm**

64796




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 100mA



| | | | |
|-----------------------------------------------------------------------------------------|---------|--------------|-----------|
|  LED | 2700K | Light Source | Luminaire |
| Power | 3,7W | | 3,7W |
| Flux | 375lm | | 300lm |
| Efficiency | 101lm/W | | 81lm/W |
| LOR | - | | 80% |
| UGR | - | | <13 |



Beam angle
Medium 26°


Application



Weight
0.08Kg



45x45

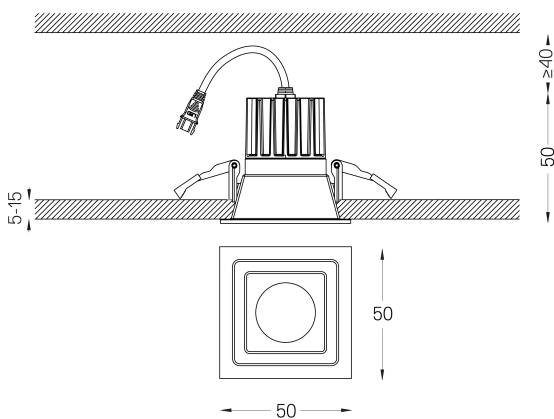

Finishes

- ☐ **.04 Matt White**
☒ **.05 Matt Black**

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

59091 Driver 1-10V [120mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 [2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-27G1000-B-83