

# Go Square

**3,7W / 300lm / 2700K / Flood 42° /  
50x50mm**

64797




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



 LED	2700K	Light Source	Luminaire
Power	3,7W		3,7W
Flux	375lm		300lm
Efficiency	101lm/W		81lm/W
LOR	-		80%
UGR	-		<16

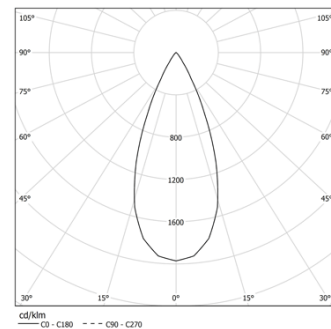

Beam angle  
Flood 42°


## Application



Weight  
0.08Kg



45x45

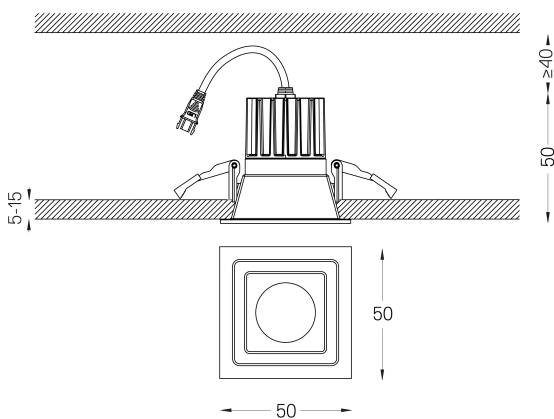

## Finishes

- .04 Matt White  
● .05 Matt Black

## Mandatory

**59088 Driver On/Off [100mA]**

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

### 59090 Driver PhaseCut [100mA]

122x41x23mm

**59091 Driver 1-10V [120mA]**

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83