

**Go  
Square**

3,7W / 315lm / 3000K / On/Off / Medium 26°  
/ 50x50mm

64799




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



 LED	3000K	Light Source	Luminaire
Power	3,7W		3,7W
Flux	395lm		315lm
Efficiency	107lm/W		85lm/W
LOR	-		80%
UGR	-		<13



Beam angle  
**Medium 26°**


## Application



Weight  
0.08Kg



45x45

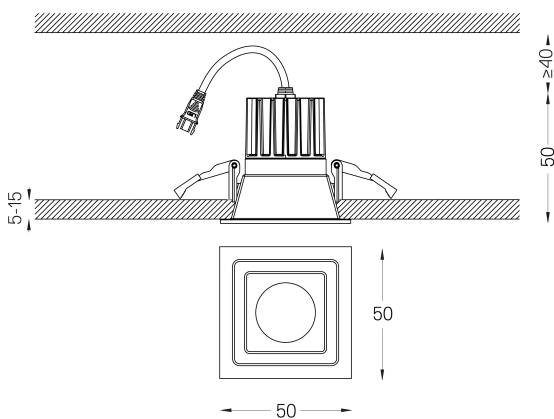

## Finishes

- .04 Matt White  
● .05 Matt Black

## Mandatory

**59088 Driver On/Off [100mA]**

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

**59090 Driver PhaseCut [100mA]**

122x41x23mm

**59091 Driver 1-10V [120mA]**



130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.


## Data according to regulations

2019/2020/EU supplemented by 2021/341 [2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-30G1000-B-83





Go Square

Driver DALI [1 luminaire] 59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,1Kg	.99

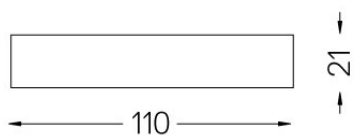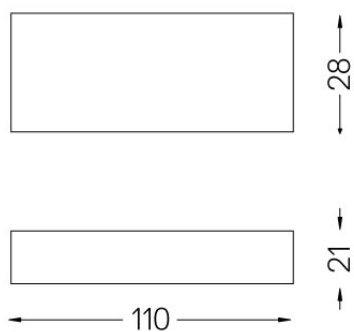

## Go Square

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,06Kg

Finishes  
.99



Go Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,08Kg	.99



## Go Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

