

3,7W / 330lm / 3500K / On/Off / Medium  
26° / 50x50mm

64802



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



LED	3500K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	410lm	330lm	330lm
Efficiency	111lm/W	89lm/W	89lm/W
LOR	-	80%	80%
UGR	-	<13	<13



Beam angle  
Medium 26°

Application



Weight  
0.08Kg



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

59091 Driver 1-10V [120mA]



130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations


2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-35G1000-B-83

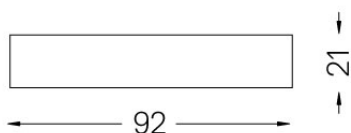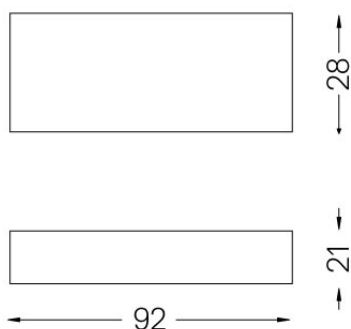

## Go Square

Driver DALI [1 luminaire]



59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight  
0,1Kg

Finishes  
.99



Go Square



Driver DALI [1 luminaire] 59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,06Kg

Finishes  
.99





Go Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



Go Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99