

3,7W / 330lm / 3500K / On/Off / Flood 42° / 50x50mm

64803




Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 100mA



LED	3500K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	410lm	330lm	330lm
Efficiency	111lm/W	89lm/W	89lm/W
LOR	-	80%	80%
UGR	-	<16	<16

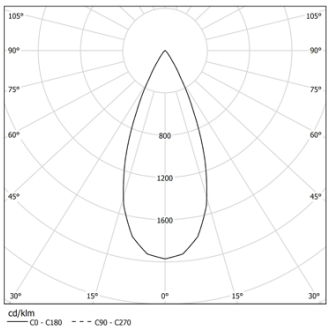

Beam angle
Flood 42°


Application



Weight
0.08Kg



45x45

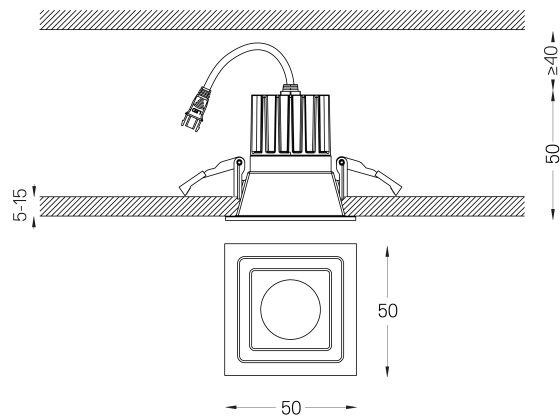

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

59091 Driver 1-10V [120mA]



130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.


Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-35G1000-B-83





Go Square

Driver DALI [1 luminaire] 59088




Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight	Finishes
0,1Kg	.99



Go Square



Driver DALI [1 luminaire] 59089



Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II


Weight
0,06Kg

Finishes
.99



Go Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



Go Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

