

3,7W / 330lm / 3500K / Flood 42° /  
50x50mm

64803



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA



| LED        | 3500K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 3,7W    | 3,7W         | 3,7W      |
| Flux       | 410lm   | 330lm        | 330lm     |
| Efficiency | 111lm/W | 89lm/W       | 89lm/W    |
| LOR        | -       | 80%          | 80%       |
| UGR        | -       | <16          | <16       |




Beam angle  
Flood 42°

Application



Weight  
0.08Kg

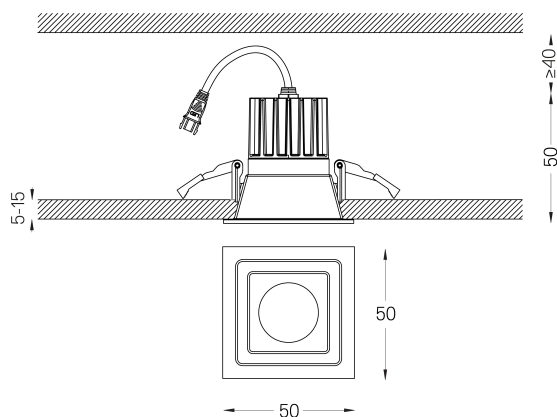

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

**59088** Driver On/Off [100mA]

138x30x21mm

**59089** Driver DALI [100mA]

144x30x21mm

**59090** Driver PhaseCut [100mA]

122x41x23mm

**59091** Driver 1-10V [120mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-35G1000-B-83