



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 100mA



| LED | 3500K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 3,7W | 3,7W | 3,7W |
| Flux | 410lm | 330lm | 330lm |
| Efficiency | 111lm/W | 89lm/W | 89lm/W |
| LOR | - | 80% | 80% |
| UGR | - | <22 | <22 |



Beam angle
Flood 60°

Application



Weight
0.08Kg



Finishes

- .04 Matt White
- .05 Matt Black


Mandatory

- 59088** Driver On/Off [100mA]
138x30x21mm
- 59089** Driver DALI [100mA]
144x30x21mm
- 59090** Driver PhaseCut [100mA]
122x41x23mm
- 59091** Driver 1-10V [120mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations


2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-35G1000-B-83

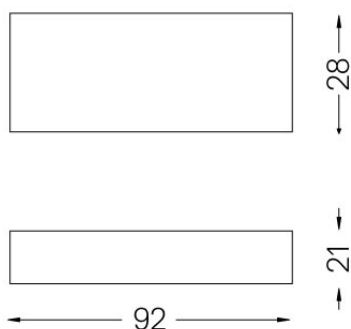

Go Square

Driver DALI [1 luminaire]



59088



Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II


Weight
0,1Kg

Finishes
.99



Go Square



Driver DALI [1 luminaire] 59089



Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,06Kg

Finishes
.99




Go Square

Driver PhaseCut [1 luminaire] 59090




Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II

| | |
|--------|----------|
| Weight | Finishes |
| 0,08Kg | .99 |



Go Square

Driver 1-10V [1 luminaire] 59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99