



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA




| LED        | 2700K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 3,7W    | 3,7W         | 3,7W      |
| Flux       | 375lm   | 285lm        | 285lm     |
| Efficiency | 101lm/W | 77lm/W       | 77lm/W    |
| LOR        | -       | 76%          | 76%       |
| UGR        | -       | <16          | <16       |



Beam angle  
Flood 42°

Application

Weight  
0.08Kg

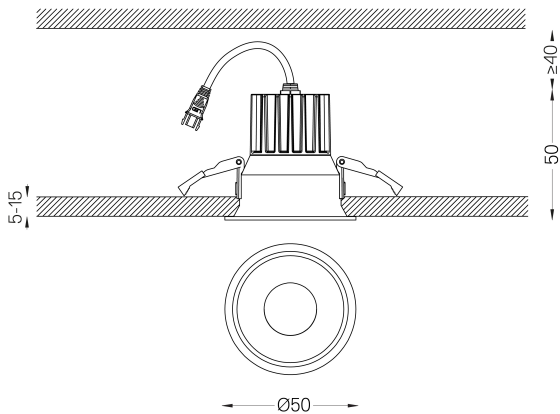

Finishes

○ .04 Matt White

● .05 Matt Black

Mandatory

**59088** Driver On/Off [100mA]  
138x30x21mm

**59089** Driver DALI [100mA]  
144x30x21mm

**59090** Driver PhaseCut [100mA]  
122x41x23mm

**59091** Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)  
The 5-year guarantee applies only when the luminaire and driver are supplied together.


Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83



## Go IP65

Driver DALI [1 luminaire]



59088





Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99

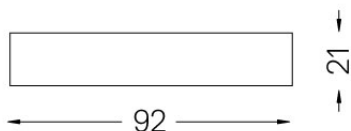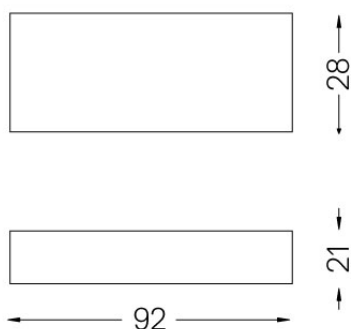




Go  
IP65

Driver DALI [1 luminaire]


59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,06Kg


Finishes  
.99

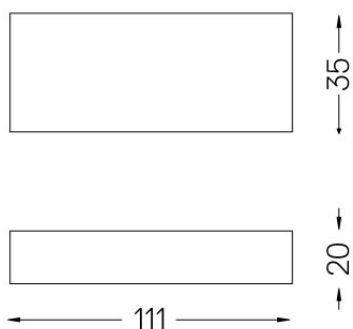

## Go IP65

Driver PhaseCut [1 luminaire]

59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99



## Go IP65

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

