



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA



LED	3000K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	395lm	395lm	300lm
Efficiency	107lm/W	107lm/W	81lm/W
LOR	-	-	76%
UGR	-	-	<10



Beam angle  
Medium 26°

Application



Weight  
0.08Kg



### Finishes

- .04 Matt White
- .05 Matt Black



### Mandatory

- 59088** Driver On/Off [100mA]  
138x30x21mm
- 59089** Driver DALI [100mA]  
144x30x21mm
- 59090** Driver PhaseCut [100mA]  
122x41x23mm
- 59091** Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)  
The 5-year guarantee applies only when the luminaire and driver are supplied together.


### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-30G1000-B-83





Go  
IP65

Driver DALI [1 luminaire] **59088**



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,1Kg	.99



Go  
IP65

Driver DALI [1 luminaire]

59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,06Kg

Finishes  
.99



## Go IP65

Driver PhaseCut [1 luminaire]



59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99

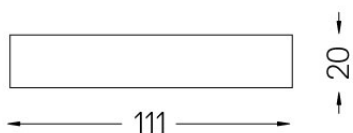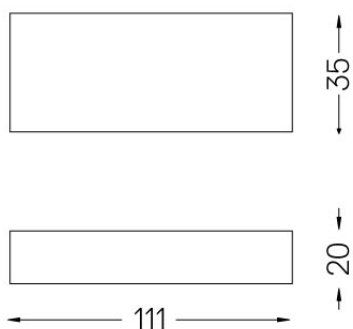



## Go IP65

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

