



**3,7W / 300lm / 3000K / On/Off / Flood 60° /
ø50mm**

64825


Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 100mA



| | | | |
|---|---------|--------------|-----------|
|  LED | 3000K | Light Source | Luminaire |
| Power | 3,7W | | 3,7W |
| Flux | 395lm | | 300lm |
| Efficiency | 107lm/W | | 81lm/W |
| LOR | - | | 76% |
| UGR | - | | <22 |



Beam angle
Flood 60°


Application



Weight
0.08Kg



045

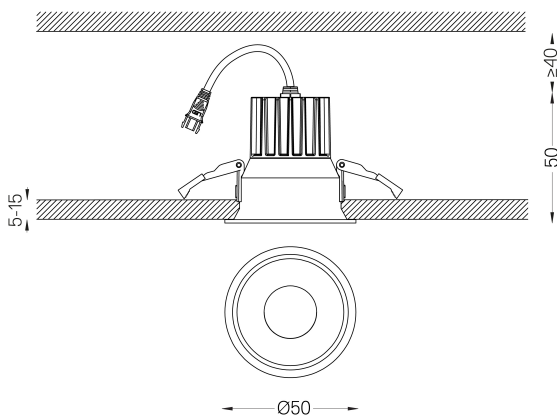

Finishes

- **.04 Matt White**
● **.05 Matt Black**

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

59091 Driver 1-10V [120mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-30G1000-B-83



Go IP65

Driver DALI [1 luminaire]



59088





Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,1Kg

Finishes
.99

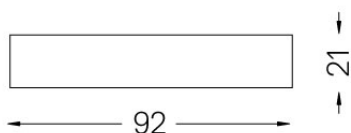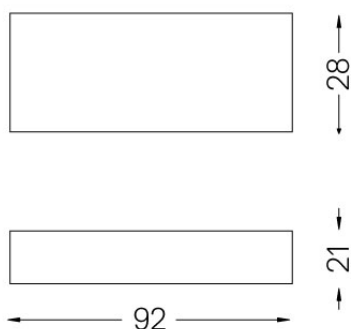




Go
IP65

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,06Kg

Finishes
.99



Go
IP65

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II

| | |
|--------|----------|
| Weight | Finishes |
| 0,08Kg | .99 |



Go IP65

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

