

**Go  
IP65**



**3,7W / 310lm / 3500K / On/Off / Medium 26°  
/ ø50mm**

64826


Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA



 LED	3500K	Light Source	Luminaire
Power	3,7W		3,7W
Flux	410lm		310lm
Efficiency	111lm/W		84lm/W
LOR	-		76%
UGR	-		<10

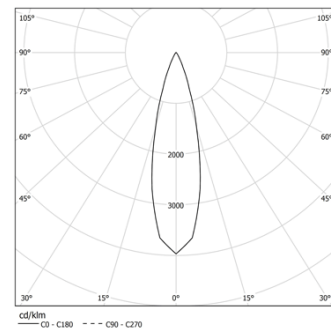

Beam angle  
**Medium 26°**


## Application



Weight  
0.08Kg



045

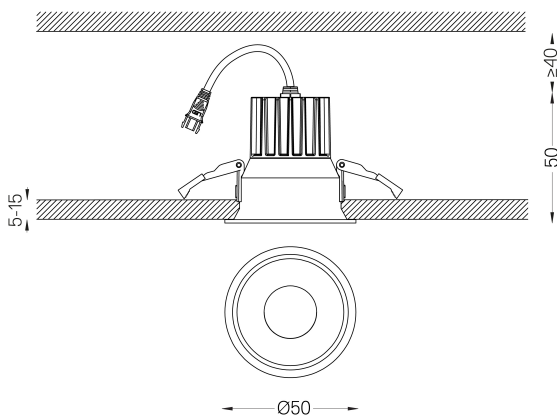

## Finishes

- .04 Matt White  
● .05 Matt Black

## Mandatory

**59088 Driver On/Off [100mA]**

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

### 59090 Driver PhaseCut [100mA]

122x41x23mm

**59091 Driver 1-10V [120mA]**

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-35G1000-B-83



## Go IP65

Driver DALI [1 luminaire]



59088




Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99

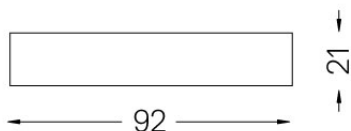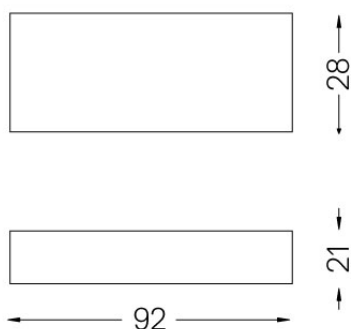


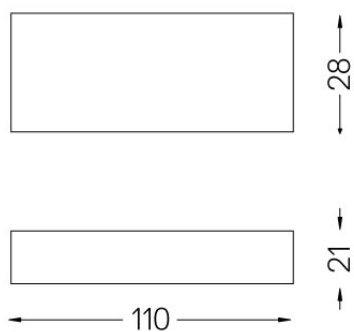

## Go IP65

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,06Kg**

Finishes  
**.99**



Go  
IP65

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,08Kg	.99



## Go IP65

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

