




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 300mA / 150mA




 LED	2700K		
		Light Source	Luminaire
Power		10W / 5W	10W / 5W
Flux		1505lm / 755lm	1130lm / 565lm
Efficiency		151lm/W	113lm/W
LOR		-	75%
UGR		-	<10



Beam angle  
Spot 20°

Application



Weight  
0.37Kg



Ø90



#### Finishes

- .04 Matt White
- .05 Matt Black

#### Mandatory

**59109** Driver On/Off [300mA]

147x43x30mm

**59108** Driver On/Off [150mA]

147x43x30mm

**59111** Driver DALI [300mA]

144x30x21mm

**59110** Driver DALI [150mA]

144x30x21mm

**59113** Driver PhaseCut [300mA]

102x51x30mm

**59112** Driver PhaseCut [150mA]

102x49x29mm

**59115** Driver 1-10V [300mA]

130x30x20mm

**59114** Driver 1-10V [150mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.



#### Data according to regulations

2019/2020/EU supplemented by 2021/341 [2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E


Model Identifier BXRE-27G10FB-C-83

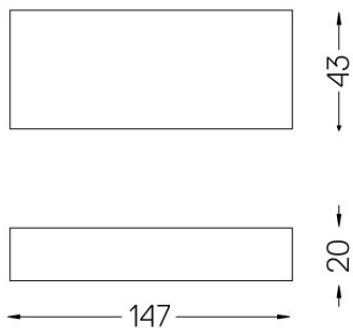

## Go IP65

Driver On/Off [1 luminaire]



59109



Driver On/Off for Go ø100  
[300mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99

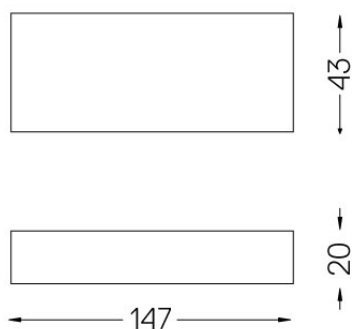

## Go IP65

Driver On/Off [1 luminaire]



59108



Driver On/Off for Go ø100  
[150mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99

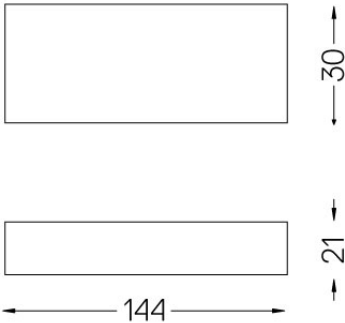

Go  
IP65

Driver DALI [1 luminaire]



59111



Driver DALI for Go ø100 [300mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99

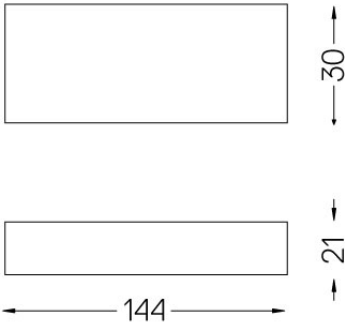

Go  
IP65

Driver DALI [1 luminaire]


59110



Driver DALI for Go ø100 [150mA]  
230Vac | 50/60Hz | Class II


Weight  
0,08Kg

Finishes  
.99

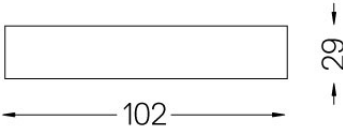

Go  
IP65



Driver PhaseCut [1 luminaire] 59113



Driver PhaseCut for Go ø100  
[300mA]  
230Vac | 50/60Hz | Class II


Weight  
0,09Kg

Finishes  
.99



Go  
IP65

Driver PhaseCut [1 luminaire] 59112



Driver PhaseCut for Go ø100  
[150mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,13Kg	.99





## Go IP65

Driver 1-10V [1 luminaire]



59115



Driver 1-10V for Go ø100 [300mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

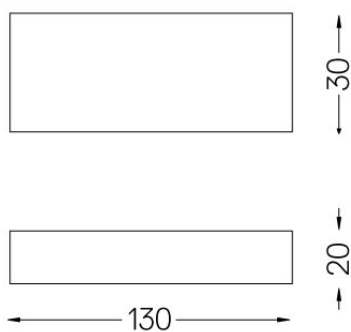



## Go IP65

Driver 1-10V [1 luminaire]

59114



Driver 1-10V for Go ø100 [150mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

