





Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 400mA / 200mA



 LED	3000K		
		Light Source	Luminaire
	Power	14W / 7W	14W / 7W
	Flux	2320lm / 1160lm	1755lm / 880lm
	Efficiency	166lm/W	125lm/W
	LOR	-	76%
	UGR	-	<19



Beam angle Flood 60°
Application 
Weight 0.37Kg



Ø90



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

- 59117** Driver On/Off [400mA]
147x43x30mm
- 59116** Driver On/Off [200mA]
147x43x30mm
- 59119** Driver DALI [400mA]
144x30x21mm
- 59118** Driver DALI [200mA]
144x30x21mm
- 59121** Driver PhaseCut [400mA]
111x22x52mm
- 59120** Driver PhaseCut [180mA]
102x49x29mm
- 59123** Driver 1-10V [400mA]
163x30x21mm
- 59122** Driver 1-10V [200mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations


2019/2020/EU supplemented by 2021/341 [2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-30G20FB-C-83



Go IP65

Driver On/Off [1 luminaire]


59117




Driver On/Off for Go ø100
[400mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

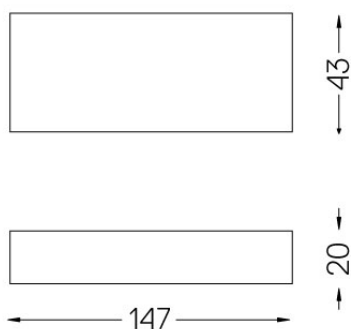


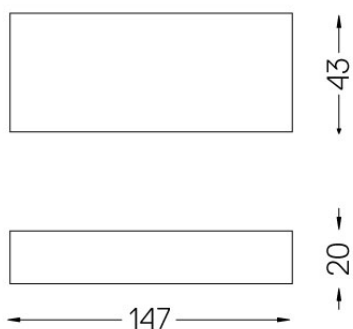

Go IP65

Driver On/Off [1 luminaire]

59116



Driver On/Off for Go ø100
[200mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg


Finishes
.99



Go
IP65

Driver DALI [1 luminaire]


59119





Driver DALI for Go ø100 [400mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99






Go
IP65

Driver DALI [1 luminaire]

59118



Driver DALI for Go ø100 [200mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg


Finishes
.99



Go IP65


Driver PhaseCut [1 luminaire]

59121



Driver PhaseCut for Go ø100
[400mA]
230Vac | 50/60Hz | Class II

Weight
0,11Kg

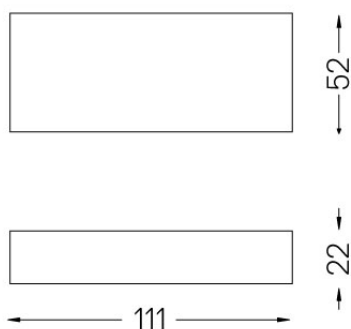




Go IP65


Driver PhaseCut [1 luminaire]

59120




Driver PhaseCut for Go ø100
[180mA]
230Vac | 50/60Hz | Class II

Weight
0,13Kg

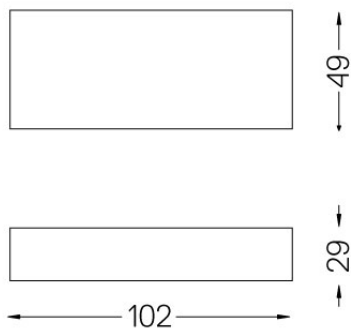

15W Driver

59123



Driver 350mA for Dot
1 to 6 luminaires
IP65 | 230Vac | 50/60Hz | Class II

Weight
0,06Kg






Go IP65

Driver 1-10V [1 luminaire]

59122



Driver 1-10V for Go ø100 [200mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

