




Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 300mA / 150mA



 LED	3500K	Light Source	Luminaire
Power	10W / 5W		10W / 5W
Flux	1540lm / 770lm		1155lm / 580lm
Efficiency	154lm/W		116lm/W
LOR	-		75%
UGR	-		<10



Beam angle
Spot 20°

Application



Weight
0.37Kg



Ø90



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59109 Driver On/Off [300mA]

147x43x30mm

59108 Driver On/Off [150mA]

147x43x30mm

59111 Driver DALI [300mA]

144x30x21mm

59110 Driver DALI [150mA]

144x30x21mm

59113 Driver PhaseCut [300mA]

102x51x30mm

59112 Driver PhaseCut [150mA]

102x49x29mm

59115 Driver 1-10V [300mA]

130x30x20mm

59114 Driver 1-10V [150mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 [2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-35G10FB-C-83



Go IP65

Driver On/Off [1 luminaire]


59109




Driver On/Off for Go ø100
[300mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

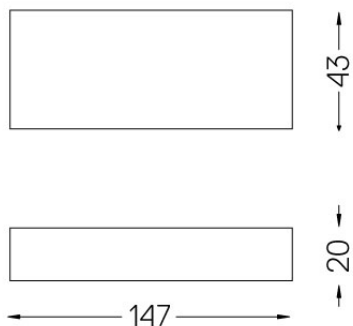



Go
IP65

Driver On/Off [1 luminaire]

59108



Driver On/Off for Go ø100
[150mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg


Finishes
.99



Go
IP65

Driver DALI [1 luminaire]


59111





Driver DALI for Go ø100 [300mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99




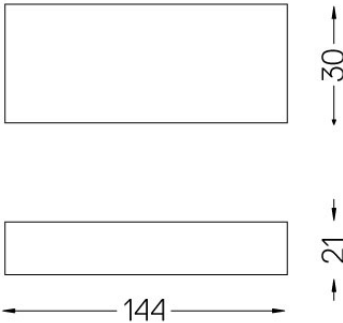

Go
IP65

Driver DALI [1 luminaire]

59110



Driver DALI for Go ø100 [150mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg


Finishes
.99



Go IP65

Driver PhaseCut [1 luminaire]


59113





Driver PhaseCut for Go ø100
[300mA]
230Vac | 50/60Hz | Class II

Weight
0,09Kg


Finishes
.99

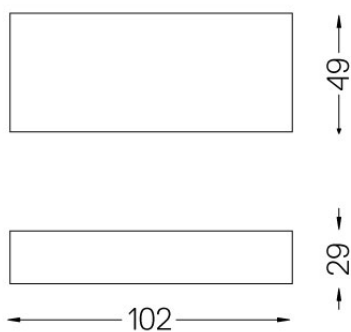



Go
IP65

Driver PhaseCut [1 luminaire] 59112



Driver PhaseCut for Go ø100
[150mA]
230Vac | 50/60Hz | Class II

Weight	Finishes
0,13Kg	.99



Go IP65

Driver 1-10V [1 luminaire]



59115



Driver 1-10V for Go ø100 [300mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

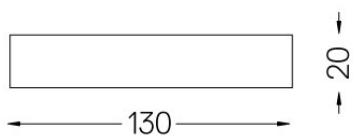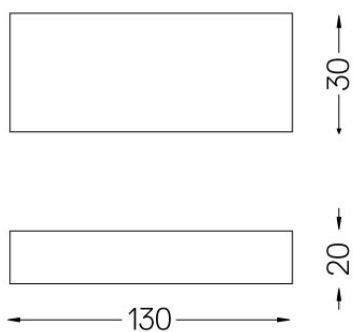



Go IP65

Driver 1-10V [1 luminaire]

59114



Driver 1-10V for Go ø100 [150mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

