





Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 400mA / 200mA




|   |                 |                |
|---|-----------------|----------------|
|  3500K | Light Source    | Luminaire      |
| Power   | 14W / 7W        | 14W / 7W       |
| Flux  | 2320lm / 1160lm | 1755lm / 880lm |
| Efficiency  | 165lm/W         | 125lm/W        |
| LOR   | -               | 76%            |
| UGR   | -               | <13            |



Beam angle  
Flood 42°

Application



Weight  
0.37Kg



Ø90



#### Finishes

- .04 Matt White
- .05 Matt Black

#### Mandatory

- 59117** Driver On/Off [400mA]  
147x43x30mm
- 59116** Driver On/Off [200mA]  
147x43x30mm
- 59119** Driver DALI [400mA]  
144x30x21mm
- 59118** Driver DALI [200mA]  
144x30x21mm
- 59121** Driver PhaseCut [400mA]  
111x22x52mm
- 59120** Driver PhaseCut [180mA]  
102x49x29mm
- 59123** Driver 1-10V [400mA]  
163x30x21mm
- 59122** Driver 1-10V [200mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

#### Data according to regulations


2019/2020/EU supplemented by 2021/341 [2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXRE-35G20FB-C-83



## Go IP65

Driver On/Off [1 luminaire]



59117




Driver On/Off for Go ø100  
[400mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99

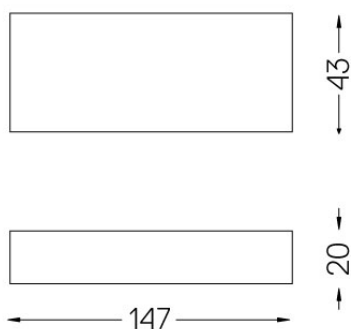




Go  
IP65

Driver On/Off [1 luminaire]

59116



Driver On/Off for Go ø100  
[200mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99



Go  
IP65

Driver DALI [1 luminaire]


59119





Driver DALI for Go ø100 [400mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99






Go  
IP65

Driver DALI [1 luminaire]

59118



Driver DALI for Go ø100 [200mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99



## Go IP65


Driver PhaseCut [1 luminaire]

59121



Driver PhaseCut for Go ø100  
[400mA]  
230Vac | 50/60Hz | Class II

Weight  
0,11Kg

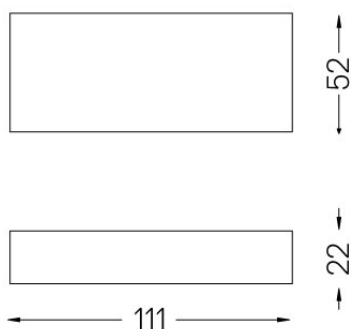




## Go IP65


Driver PhaseCut [1 luminaire]

59120



Driver PhaseCut for Go ø100  
[180mA]  
230Vac | 50/60Hz | Class II


Weight  
0,13Kg

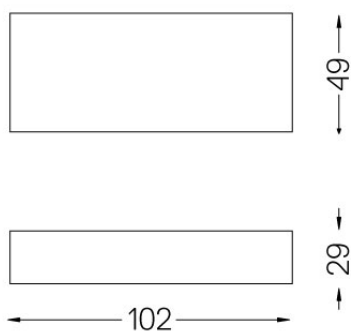



15W Driver

59123



Driver 350mA for Dot  
1 to 6 luminaires  
IP65 | 230Vac | 50/60Hz | Class II

Weight  
**0,06Kg**






## Go IP65

Driver 1-10V [1 luminaire]

59122



Driver 1-10V for Go ø100 [200mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

