

3,7W / 285lm / 2700K / On/Off / Medium  
26° / 50x50mm

64860



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA

LED	2700K	Light Source	Luminaire
Power		3,7W	3,7W
Flux		375lm	285lm
Efficiency		101lm/W	77lm/W
LOR		-	76%
UGR		-	<10

Beam angle  
Medium 26°

Application

Weight  
0.08Kg

45x45



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

59091 Driver 1-10V [100mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83



## Go IP65 Square

Driver DALI [1 luminaire]



59088





Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99

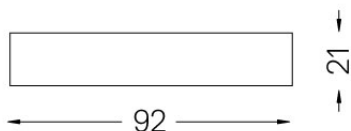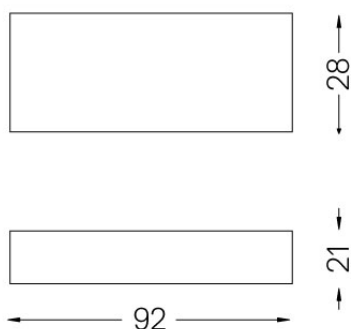


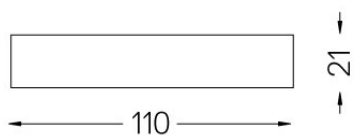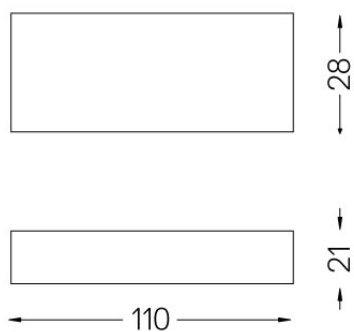

## Go IP65 Square

Driver DALI [1 luminaire]


59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,06Kg**


Finishes  
**.99**

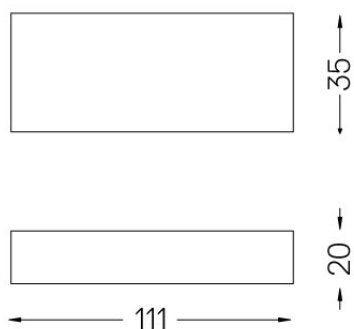

## Go IP65 Square

Driver PhaseCut [1 luminaire]

59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99



## Go IP65 Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

